

TECHINICAL SPECIFICATION



3D Curved Massage Head



5 adjustable EMS intensities




EMS & LED Synergy




6 Min Visible Lift



FRONT VIEW

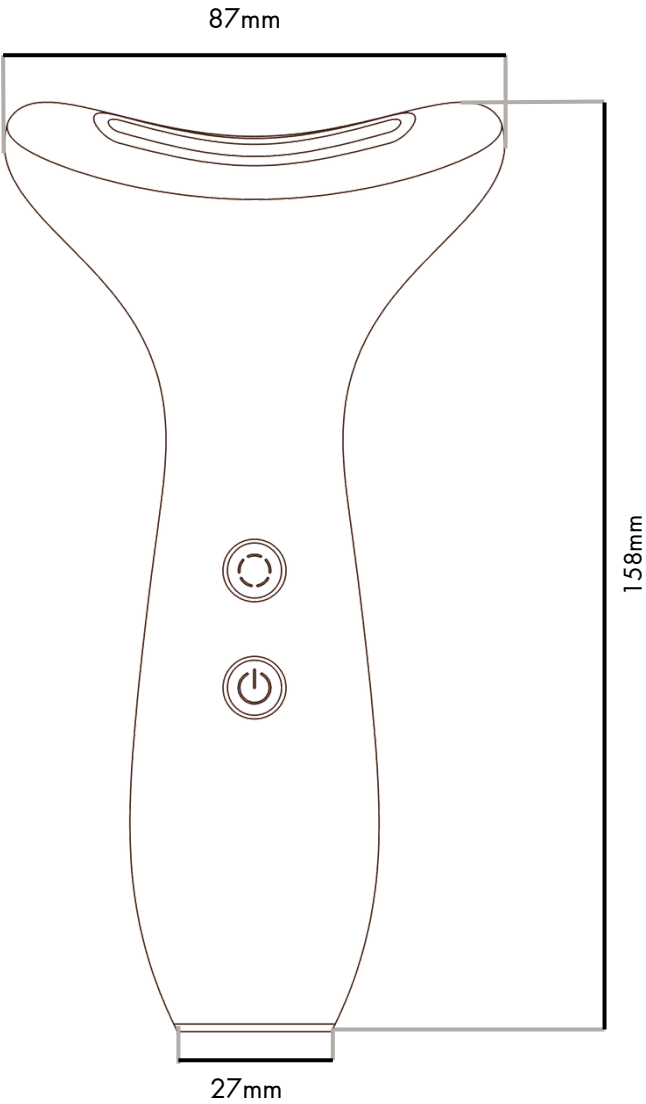

SIDE VIEW

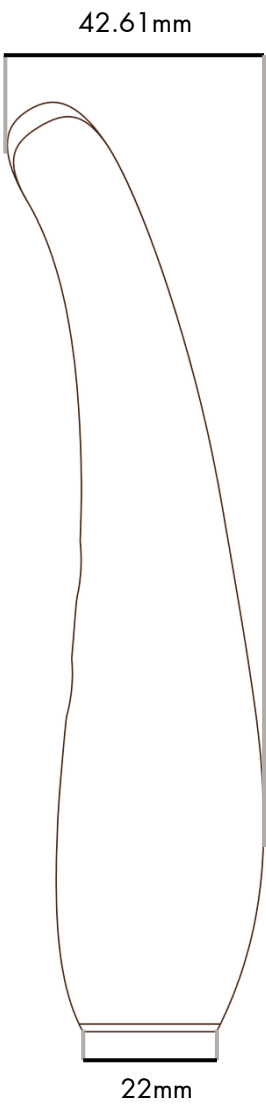

Device size

Product size: 87 mm (W) x 158 mm (H) x 42.61 mm (D)
Bottom handle width: 27 mm, Bottom handle depth: 22 mm

NICEMAY MR-2368 EMS FACE & NECK TIGHTENING DEVICE

Electrical

Rated voltage: 3.7 V
Rated current: Max. 2 A
Rated power: 9 W
Low-voltage warning level: 3.4 V

Battery & Charging

Battery type: Lithium battery
Battery capacity: 1000 mAh
Charging input: 5 V / <700 mA
Charging current: <1 A
Charging time: <3 hours
Operating cycles per full charge: 7 times


Operation

Vibration pattern: Continuous / Breathing / Intermittent vibration
Single operating time: 6 minutes
Area-switch reminder: every 60 seconds
5 adjustable intensity levels
Tighten Mode: Red light 633 nm / Heating / EMS / Continuous vibration
Brighten Mode: Green light 525 nm / Heating / EMS / Breathing vibration
Soothe Mode: Blue light 470 nm / Non-heating / EMS / Intermittent vibration

Thermal & Electrical Output

Temperature: 42°C ±5°C
EMS frequency: Level 1 88 ±3 kHz / Level 2 80 ±3 kHz / Level 3 72 ±3 kHz / Level 4 65 ±3 kHz / Level 5 60 ±3 kHz

Additional Offering

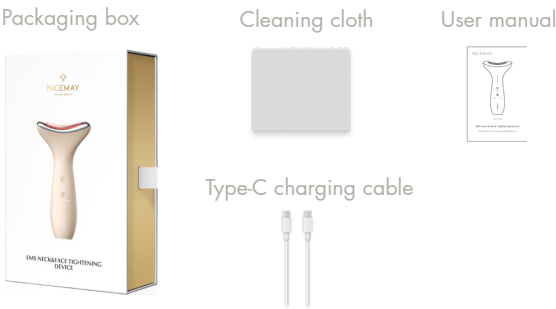

Logistics

Product net weight: 143 g
Unit gross weight (including packaging) : 488.5 g
Package size: 148 mm (W) × 245 mm (H) × 60 mm (D)
Quantity per carton: 20 pcs (2 × 2 × 5)
Carton net weight: 9.70 kg
Carton gross weight: 10.20 kg
Carton size: 510 mm (L) × 313 mm (W) × 325 mm (H)
Carton volume: 0.05 m³

Construction

Materials: Silicone, ABS, Zinc alloy, PC
Water resistance rating: IPX6



Product Color



Certification

