

TECHINICAL SPECIFICATION

3 Adjustable EMS & LED Intensities

75° Spa-Kneading Roller Angle

Three Vibration Rhythms



Enlarged Full-Metal Dual Rollers



FRONT VIEW

SIDE VIEW

PRODUCT WITH STANDING BASE

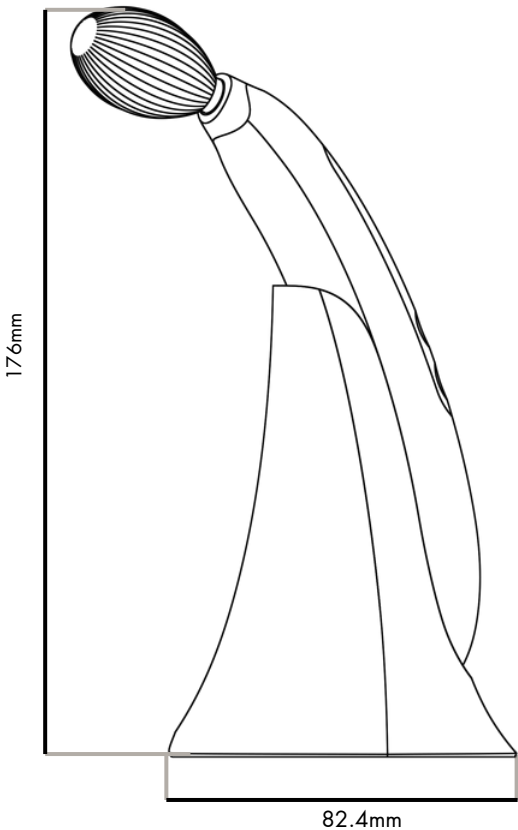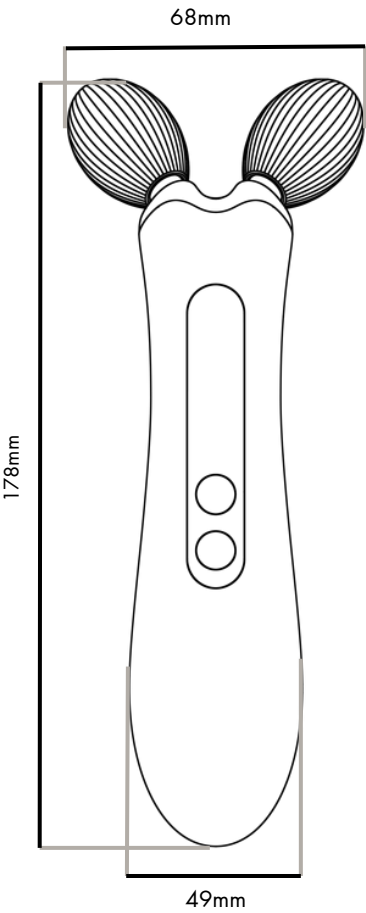

Device size

Product size: 68 mm (W) × 178 mm (H) × 47 mm (D)
Handle bottom size: 49 mm (W) × 36 mm (D)

Product size with standing base: 82.4 mm (W) × 176 mm (H)

NICEMAY MR-2522 EMS BODY SILIMMING ROLLER

Electrical

Rated voltage: 3.7 V
Rated current: Max. 0.3 A
Rated power: ≤2 W
Low-voltage warning level: 3.4 V ±0.15 V

Battery & Charging

Battery type: Lithium battery
Battery capacity: 500 mAh
Charging input: DC 5 V
Charging current: <350 mA
Charging time: <3 hours

Operation

Vibration pattern: Tapping / Continuous / Intermittent breathing
Single operating time: 6 mins ±5 s
Area-change reminder: every 60 seconds
4 adjustable intensity levels
FACE Mode: Green light 520 nm ±10 / EMS / Tapping vibration
NECK Level: Red light 630 nm ±10 / EMS / Continuous vibration
BODY Level: Yellow light 520 nm ±10 + 630 nm ±10 / EMS / Intermittent breathing vibration

Output Frequency & Voltage

FACE Mode: Level 1 20 ±5 V / Level 2 29 ±5 V / Level 3 34 ±6 V / Level 4 40 ±6 V
NECK Level: Level 1 20 ±5 V / Level 2 28 ±5 V / Level 3 35 ±6 V / Level 4 40 ±6 V
BODY Level: Level 1 25 ±5 V / Level 2 34 ±6 V / Level 3 40 ±6 V / Level 4 42 ±6 V

Additional Offering

Packaging box



Cleaning cloth



USB-C charging cable



User manual



Standing base



Logistics

Product net weight (including standing base) : 281.5 g
Unit gross weight (including standing base and packaging) : 989 g
Package size: 231 mm (W) × 231 mm (H) × 99 mm (D)
Quantity per carton: 20 pcs (2 × 2 × 5)
Carton net weight: 19.78 kg
Carton gross weight: 20.78 kg
Carton size: 482mm (L) × 477 mm (W) × 515 mm (H)
Carton volume: 0.118 m³

Construction

Product materials: Silicone, ABS, Zinc alloy, PC
Standing base materials: Acrylic
Water resistance rating: IPX6



Product Color

Warm
Beige



Certification

CE RoHS