

TECHINICAL SPECIFICATION



6-in-1 Multi-Technology Matrix



6 Smart Treatment Modes




3D Contouring Rollers




4-Spectrum LED Therapy




FRONT VIEW

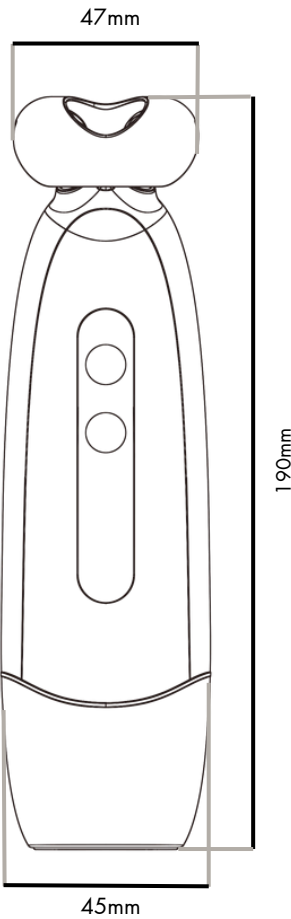


SIDE VIEW

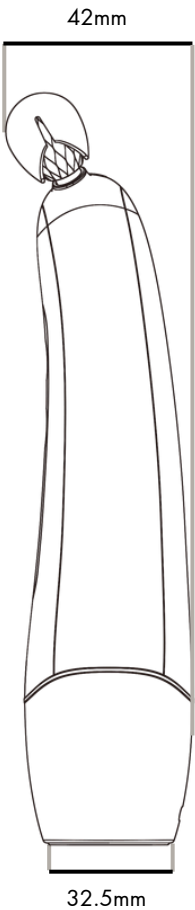

MASSAGE HEAD VIEW



MASSAGE ROLLER VIEW



Device size

Product size: 47 mm (W) x 190 mm (H) x 42 mm (D)
Massage head with protective cover: 45 mm (W) x 32.5 mm (D)

Massage head contact surface: 38.2 mm (W) x 30 mm (D)
Massage roller contact surface width: 43.2 mm

NICEMAY MR-2590 LUMILIFT PRO MULTI-ACTION FACIAL DEVICE

Electrical

Rated voltage: 3.7 V
Rated current: Mode 1–5 Max. 0.6 A / Mode 6 Max. 1.2 A
Rated power: ≤8 W
Low-voltage warning level: 3.6 V ±0.15 V

Battery & Charging

Battery type: Lithium battery
Battery capacity: 1200 mAh
Charging input: DC 5 V / 1 A
Charging current: <600 mA
Charging time: <4 hours
Operating time per full charge: BOOSTER Mode: 100 min / MC Mode: 50 min / DERMA-SHOT Mode: 90 min / AIR-SHOT Mode: 150 min / LIFT Mode: 120 min / ANTI-A Mode: 80 min

Operation

Vibration pattern: Gentle tapping / Variable vibration / Short-wave vibration
Single operating time: 5 minutes
Standby auto shut-off: 3 minutes
Idle auto shut-off: 10 seconds
5 adjustable intensity levels
BOOSTER Mode: Yellow light 530 nm ±10 + 630 nm ±10 / Vibration / Electroporation
MC Mode: Green light 530 nm ±10 / Vibration / Microcurrent
DERMA-SHOT Mode: Red light 630 nm ±10 / Vibration / EMS
AIR-SHOT Mode: Blue light 470 nm ±10 / Electric needle / Short-wave vibration
LIFT Mode: Red light 630 nm ±10 / Microcurrent
ANTI-A Mode: Red light 630 nm ±10 / RF

Output Frequency & Voltage

Operating frequency: BOOSTER Mode 60 kHz ±5 / MC Mode 60 kHz ±5 / DERMA-SHOT Mode 60 kHz ±5 / AIR-SHOT Mode 100 kHz ±20 / LIFT Mode 4 kHz ±0.5 / ANTI-A Mode 1 MHz ±0.2
Output VPP voltage at 4 V: BOOSTER Mode 120 ±20 V / MC Mode 110 ±20 V / DERMA-SHOT Mode 120 ±20 V / AIR-SHOT Mode 2200 ±300 V / LIFT Mode 25.5 ±15 V / ANTI-A Mode 118 ±30 V

Additional Offering

Packaging box	Cleaning cloth	User manual
		
Type-C charging cable		
		

Logistics

Product net weight: 262 g
Unit gross weight (including packaging) : 596.5 g
Package size: 148 mm (W) × 245 mm (H) × 60 mm (D)
Quantity per carton: 20 pcs (2 × 2 × 5)
Carton net weight: 11.93 kg
Carton gross weight: 12.93 kg
Carton size: 510 mm (L) × 313 mm (W) × 325 mm (H)
Carton volume: 0.05 m³

Construction

Materials: Zinc alloy, ABS, PC, PP
Water resistance rating: IPX6



Product Color

Silver Grey	Warm Beige
	

Certification

