

TECHINICAL SPECIFICATION



0.5cm

0.5cm Slim Guasha Head
for Zero-Gap Precision



Tri-Spectrum LED with
45% Wider Coverage




EMS Microcurrent for
Sculpted Contours



Thermal Infusion for
Deeper Absorption




FRONT VIEW

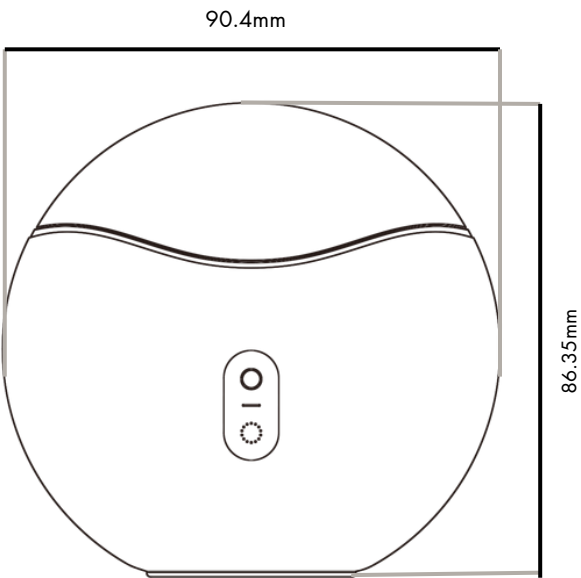


SIDE VIEW



TOP VIEW WITH
PROTECTIVE COVER

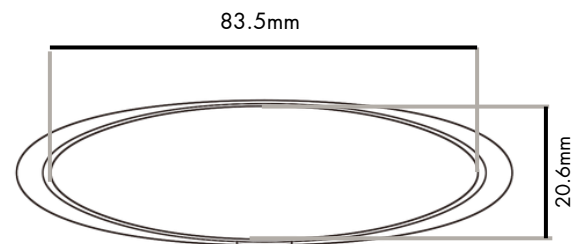

TOP VIEW OF
MASSAGE HEAD
CONTACT SURFACE

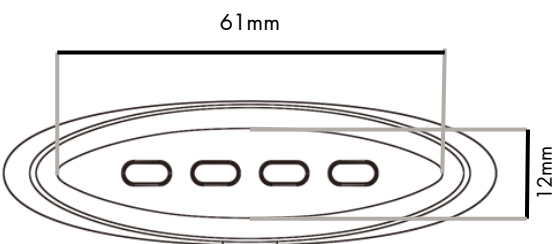

Device size

Product size with protective cover: 90.4 mm (W) x 86.35 mm (H) x 26.4 mm (D)
Base width with protective cover: 38.2 mm

Top-view profile with protective cover: 83.5 mm (L) x 20.6 mm (T)
Massage head contact surface: 61 mm (L) x 12 mm (W)

NICEMAY MR-2610 MICROCURRENT & LED GUASHA MASSAGER

Electrical

Rated voltage: 3.7 V

Rated current: Max. 1A

Rated power: <4.5 W

Battery & Charging

Battery type: Lithium battery

Battery capacity: 500 mAh

Charging input: DC 5 V / 1 A

Charging current: <400 mA

Charging time: <3 hours

Operating cycles per full charge: ≥60 minutes no-load / ≥30 minutes loaded

Operation

Vibration pattern: Continuous / Pulsed / Intermittent

Single operating time: 6 minutes ±5 seconds

Area-change reminder: 1 minute ±5 seconds

5 adjustable intensity levels

FACE Mode: Red light 630 nm / 42°C constant heat / EMS / Continuous vibration

EYES Mode: Green light 520 nm / 42°C constant heat / EMS / Pulsed vibration

NECK Mode: Yellow light 590 nm / 42°C constant heat / EMS / Intermittent vibration

Thermal & Electrical Output

Heating temperature: 42±5°C

Maximum temperature: ≤47°C

Heating mode: Constant heat

EMS frequency: 4 kHz ±10 Hz

EMS VPP voltage at 4 V: Level 1 37 ±5 V / Level 2 40 ±5 V / Level 3 43 ±5 V / Level 4 47 ±5 V / Level 5 52 ±5 V

Additional Offering

Packaging box



Cleaning cloth



User manual



Type-C charging cable



Logistics

Product net weight: 101.5 g

Unit gross weight (including packaging) : 367.5 g

Package size: 148mm (W) ×181 mm (H) × 60 mm (D)

Quantity per carton: 20 pcs (2 × 2 × 5)

Carton net weight: 7.35 kg

Carton gross weight: 8.35 kg

Carton size: 510 mm (L) × 313 mm (W) × 325 mm (H)

Carton volume: 0.05 m³

Construction

Materials: Silicone, ABS, PC, Zinc alloy

Water resistance rating: IPX6



Product Color

Warm Beige



Certification

CE RoHS