

TECHINICAL SPECIFICATION



Targeted for Delicate Eye Contour



Dual Photon Therapy
Engineered for Deeper Renewal




EMS Heat and Vibration
Engineered to Lift Deeper Layers



6 Min Visible Lift



FRONT VIEW

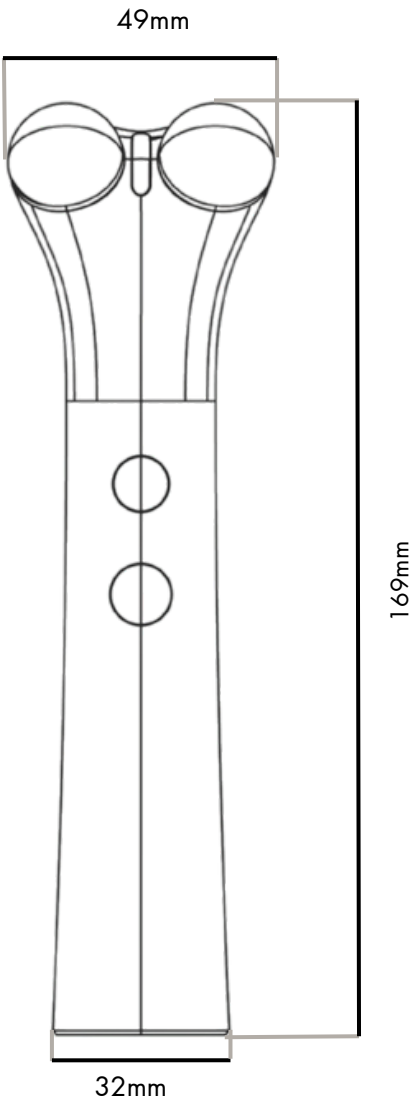

SIDE VIEW



Device size

Product size: 49 mm (W) x 169 mm (H) x 37 mm (D)
Bottom handle width: 32 mm, Bottom handle depth: 23 mm

NICEMAY MR-2622 MICRO-CURRENT LIFTING DEVICE FOR THE EYES

Electrical

Rated voltage: 3.7 V
Rated current: Max. 2 A
Rated power: 8 W
Low-voltage warning level: 3.4 V $\pm$ 0.2 V

Battery & Charging

Battery type: Lithium battery
Battery capacity: 1000 mAh
Charging input: 5 V / <1 A
Charging current: <1 A
Charging time: <3 hours
Operating cycles per full charge: $\geq$ 10 cycles

Operation

Vibration pattern: Pulsed / Continuous
Single operating time: 6 minutes
Area-change reminder: 60 seconds
Standby auto shut-off: 3 minutes
Intensity levels: 4 adjustable intensity levels
Slim Mode: Green light 520 nm $\pm$ 10 / Heating / Pulsed vibration / EMS
UP Mode: Red light 630 nm $\pm$ 10 / Heating / Continuous vibration / EMS

Thermal & Electrical Output

Heating temperature: 37°C $\pm$ 5°C
Maximum temperature: $\leq$ 42°C
EMS frequency: SLIM Mode 2 Hz $\pm$ 0.3 / UP Mode 1 Hz $\pm$ 0.2
EMS VPP voltage: Level 1 20 $\pm$ 5 V / Level 2 25 $\pm$ 5 V / Level 3 30 $\pm$ 5 V / Level 4 35 $\pm$ 5 V

Additional Offering

Packaging box



Cleaning cloth



User manual



Type-C charging cable



Logistics

Product net weight: 141.5 g
Unit gross weight (including packaging) : 491.5 g
Package size: 148 mm (W) x 245 mm (H) x 60 mm (D)
Quantity per carton: 20 pcs (2 x 2 x 5)
Carton net weight: 9.83 kg
Carton gross weight: 10.83 kg
Carton size: 510 mm (L) x 313 mm (W) x 325 mm (H)
Carton volume: 0.05 m³

Construction

Materials: ABS, PC, Zinc alloy
Water resistance rating: IPX6



Product Color

Sandy Beige



Certification

