

TECHINICAL SPECIFICATION



EMS & LED Synergy



2 Modes & 4 Gears




Esthetician Kneading




Sleek Pen-Style Grip



FRONT VIEW

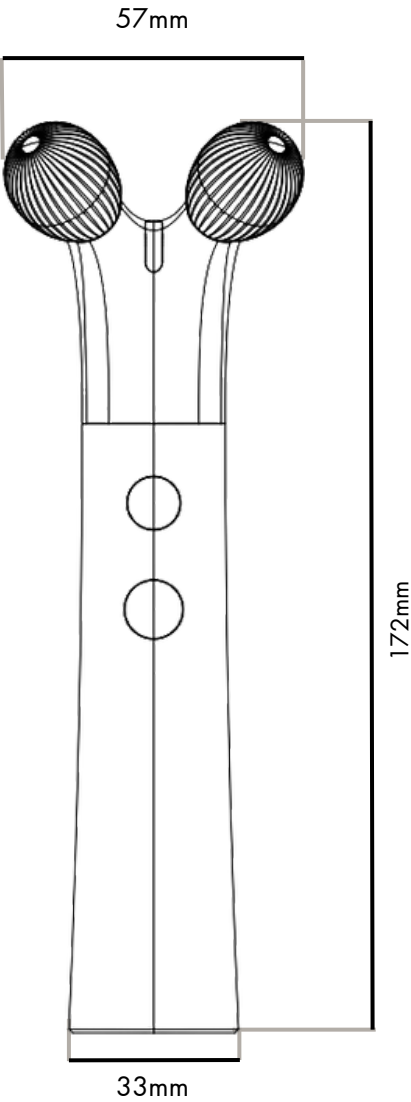

SIDE VIEW

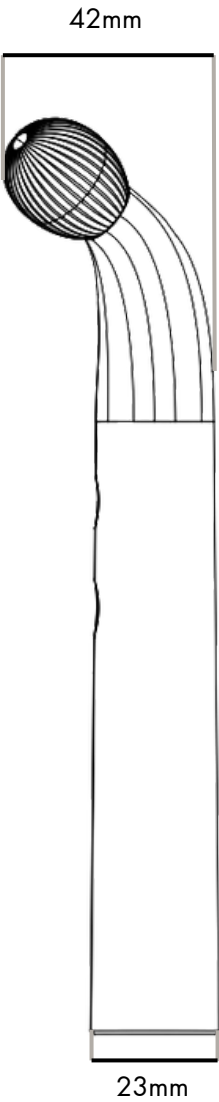

Device size

Product size: 57 mm (W) x 172 mm (H) x 42 mm (D)
Bottom handle width: 33 mm, Bottom handle depth: 23 mm

NICEMAY MR-2623 MICRO-CURRENT LIFTING ROLLER FOR THE FACE

Electrical

Rated voltage: 3.7 V
Rated current: Max. 0.5A
Rated power: 2 W
Low-voltage warning level: 3.4V±0.15

Battery & Charging

Battery type: Lithium battery
Battery capacity: 1000 mAh
Charging input: 5 V / <1A
Charging current: <0.8 A
Charging time: <3 hours
Operating cycles per full charge: ≥20 cycles


Operation

Vibration pattern: Pulsed / Continuous
Single operating time: 6 minutes
Area-change reminder: 60 seconds
Standby auto shut-off: 6 minutes
Intensity levels: 4 adjustable intensity levels
Slim Mode: Green light 520 nm ±10% / Pulsed vibration / EMS
UP Mode: Red light 630 nm ±10% / Continuous vibration / EMS

Output Frequency & Voltage

EMS frequency: SLIM Mode 2 Hz ±0.3 / UP Mode 1 Hz ±0.2
EMS VPP voltage: Level 1 20 ±5 V / Level 2 25 ±5 V / Level 3 30 ±5 V / Level 4 35 ±5 V

Additional Offering

Packaging box	Cleaning cloth	User manual
		
Type-C charging cable		
		

Logistics

Product net weight: 167 g
Unit gross weight (including packaging) : 517 g
Package size: 148 mm (W) x 245 mm (H) x 60 mm (D)
Quantity per carton: 20 pcs (2 x 2 x 5)
Carton net weight: 10.34 kg
Carton gross weight: 11.34 kg
Carton size: 510 mm (L) x 313 mm (W) x 325 mm (H)
Carton volume: 0.05 m³

Construction

Materials: ABS, PC, Zinc alloy
Water resistance rating: IPX6



Product Color

Sandy Beige



Certification

CE RoHS