

TECHINICAL SPECIFICATION



Innovative All-Metal Body



3 Adjustable EMS Intensities




Wing-Shaped Precision Grip




UV-C Sanitizing
Charging Base




FRONT VIEW

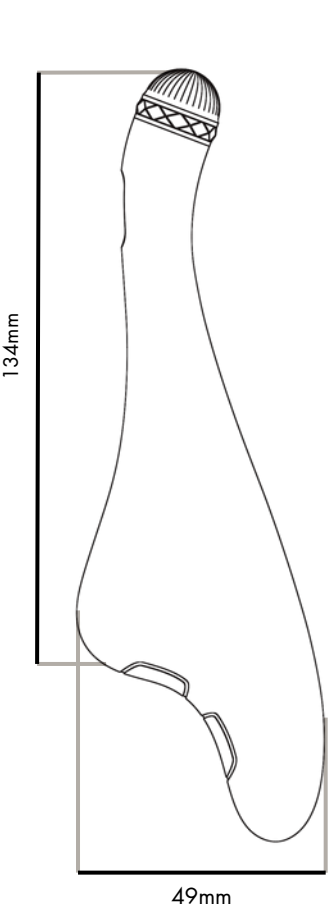


SIDE VIEW

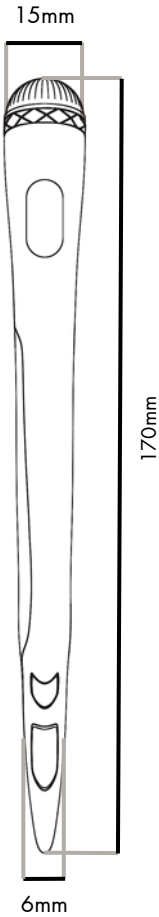

PRODUCT WITH CHARGING BASE

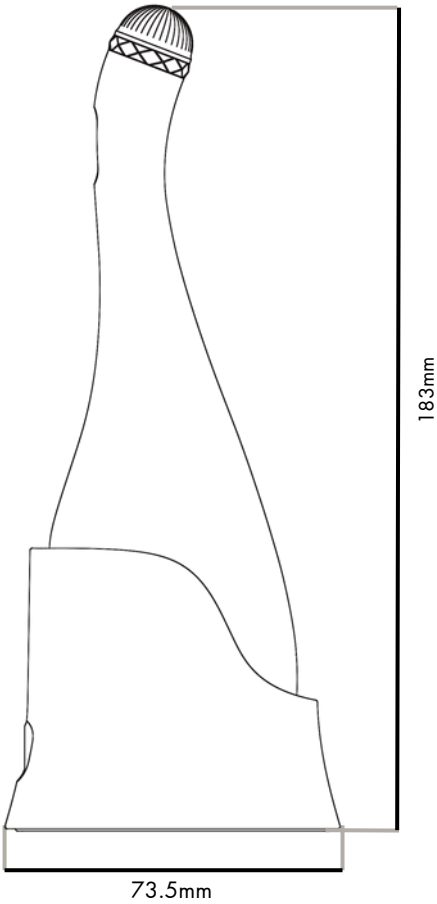

CHARGING BASE
BOTTOM VIEW

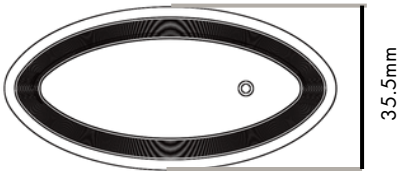

Device size

Product size: 49 mm (W) x 134 mm (H) x 15 mm (D), Side body width: 6 mm
Product size with charging base: 73.5 mm (W) x 183 mm (H)

Charging base bottom size: 73.5 mm (W) x 35.5 mm (D)

NICEMAY MR-2537 MICROCURRENT EMS PRO+ MULTILIFT DEVICE

Electrical

Rated voltage: 3.7 V
Rated current: Max. 0.33 A
Rated power: 3 W
Low-voltage warning level: 3.5 V $\pm$ 0.15 V

Battery & Charging

Battery type: Lithium battery
Battery capacity: 300 mAh
Charging input: DC 5 V / <1 A
Charging current: $\leq$ 500 mA
Charging time: <3 hours
Operating time per full charge: $\geq$ 1 hour no-load

Operation

Vibration pattern: Sonic vibration
Single operating time: 6 min (360 $\pm$ 5 s)
3 adjustable intensity levels
Low Level: Green light 520 nm / EMS low intensity / Sonic vibration
Medium Level: Orange light 520 nm + 620 nm / EMS medium intensity / Sonic vibration
High Level: Red light 620 nm / EMS high intensity / Sonic vibration

Output Frequency & Voltage

EMS frequency: 8 kHz $\pm$ 0.5 kHz
EMS VPP voltage: 45-55 V

Additional Offering

Packaging box



Cleaning cloth



User manual



USB-C charging cable



Logistics

Product net weight (including charging base) : 216.5 g
Unit gross weight (including charging base and packaging) : 580 g
Package size: 148 mm (W) $\times$ 245 mm (H) $\times$ 60 mm (D)
Quantity per carton: 20 pcs (2 $\times$ 2 $\times$ 5)
Carton net weight: 11.6 kg
Carton gross weight: 12.5 kg
Carton size: 510 mm (L) $\times$ 313 mm (W) $\times$ 325 mm (H)
Carton volume: 0.05 m³

Construction

Product materials: Zinc alloy, PC
Charging base materials: ABS, Silicone
Water resistance rating: IPX6



Product Color

Polished
Silver



Certification

